


Eyoyo EY-009P BLE 2.0

Setup on the scanner


1. Scan the following QR code to activate the "BLE Mode" and start pairing

Setup in the DeDeSales App

1. Please start the DeDeSales app and open the Main Menu via the citizen menu.

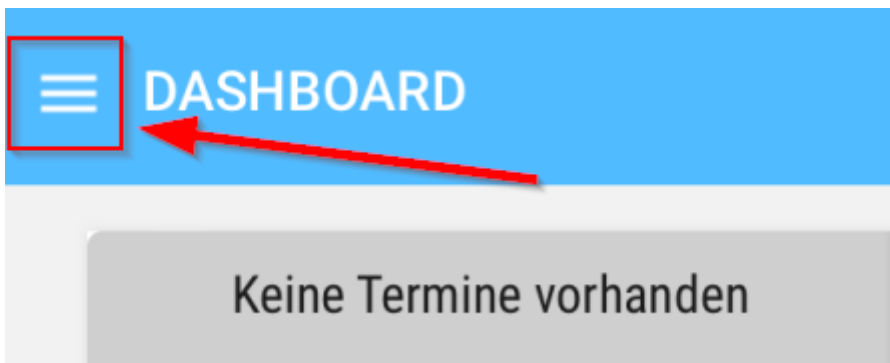

1. In the Main Menu, open the Settings via the gear icon.

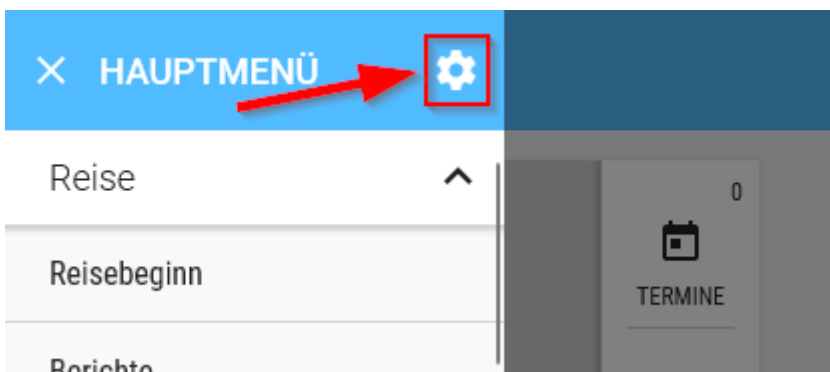

1. In the Settings, select BLE under Type of scanner and select your EY-009 BLE under Scanner. Finally, click Save at the very bottom. (On Windows and Android, the Type of scanner option does not exist.)

Scanner

Scannertyp

BLE

Scanner

EY-009 BLE

Produktnummereingabe

SPEICHERN

1. The scanner is now connected to DeDeSales and ready for use.

Offline Scan Function

1. To activate the Offline Scan function (the scanner does not need to be reconnected), the "Storage mode" QR code must be scanned:

Storage mode:



1. All subsequently scanned barcodes will be stored on the scanner.
2. To transfer the barcodes, click on Transfer barcodes in the client.



1. After the "Transfer barcodes" window has opened, you can transfer the scanned barcodes via the QR code. For this, scan the "Data upload" QR code.



Data Upload:

BARCODES ÜBERNEHMEN ✕

ÜBERNEHMEN

1. After the barcodes have been transferred, you can click on "Apply" and the barcodes will be transferred.

BARCODES ÜBERNEHMEN ✕

4005086146204
4005086141933
42214410

ÜBERNEHMEN

1. After all data has been successfully transferred, you can delete the barcodes from the scanner via the "Delete data" QR code; otherwise, they will be transferred again.

Delete data:



1. Barcode to reactivate the normal scan mode:

Normal mode:



Troubleshooting

1. If necessary, the scanner can be reset to factory settings via this barcode. The initial setup may need to be performed again afterwards.
1. When the scanner is connected to the device for the first time, the barcode from the manual must be used. Pairing via the device functionality (press button for 8 seconds) does not work because HID mode is activated there.

Revision #7

Created 2026-08-31 10:38:35 UTC by n8n

Updated 2026-09-02 15:04:50 UTC by n8n